




SAGE PRIME ISOLATOR HART ENABLED 110VAC

Note: Sage Isolator board provides isolated VDC for isolated 4-20 mA for HART Operation

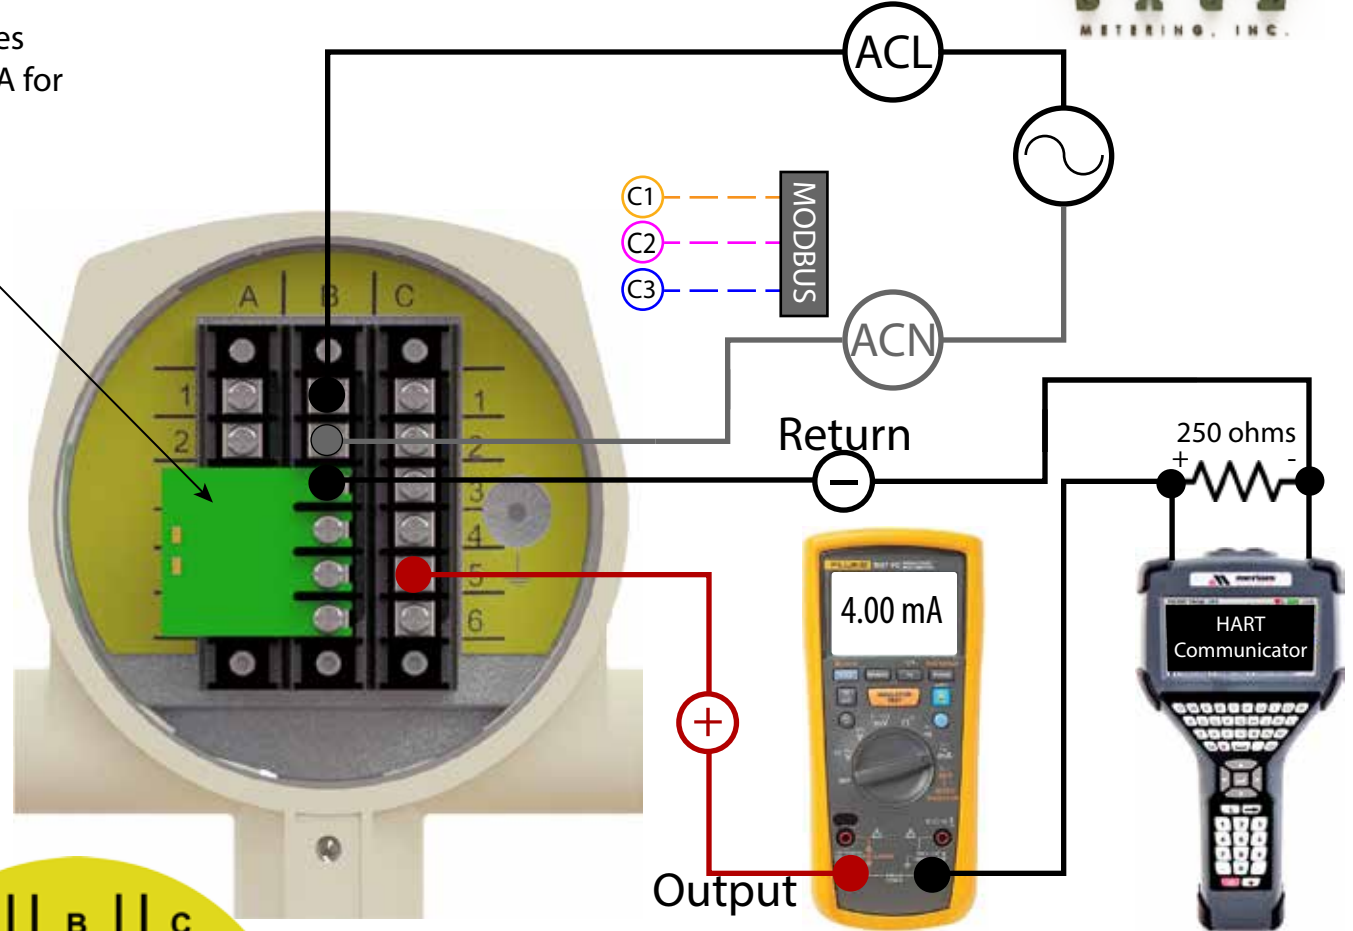

Torque all connections to 4.43 to 5.31 in-lbs (0.5 to 0.6 Nm). Insulated conductors (75°C)

	A	B	C
RED	1	ACL	1
S1	2	ACN	2
RED	3	ISOLATOR	3
WHITE	4	ISOLATOR	4
S2	5	ISOLATOR	5
WHITE	6	ISOLATOR	6

MODBUS
80-0114-RevC_S88 HART, AC, ISOLATED, INTERNALLY POWERED

Torque all connections to 4.43 to 5.31 in-lbs (0.5 to 0.6 Nm). Insulated conductors (75°C)

	A	B	C
RED	1	ACL	1
GREEN	2	ACN	2
BLUE	3	ISOLATOR	3
WHITE	4	ISOLATOR	4
BLACK	5	ISOLATOR	5
ORANGE	6	ISOLATOR	6

MODBUS
80-0116-RevC_S88 HART, AC, ISOLATED, INTERNALLY POWERED