


### SAGE PRIME 4-20mA & mA PULSE OUT 110 VAC

Standard PRIMES are shipped with a jumper between pins B4 & B5. This jumper provides +24 VDC to pin B4 to power the 4-20 mA and Pulse outputs. (Note: If isolated 4-20mA and / or pulse output is required, the jumper must be removed. A separate power supply must be used to supply power to pin B4 for these isolated outputs.)

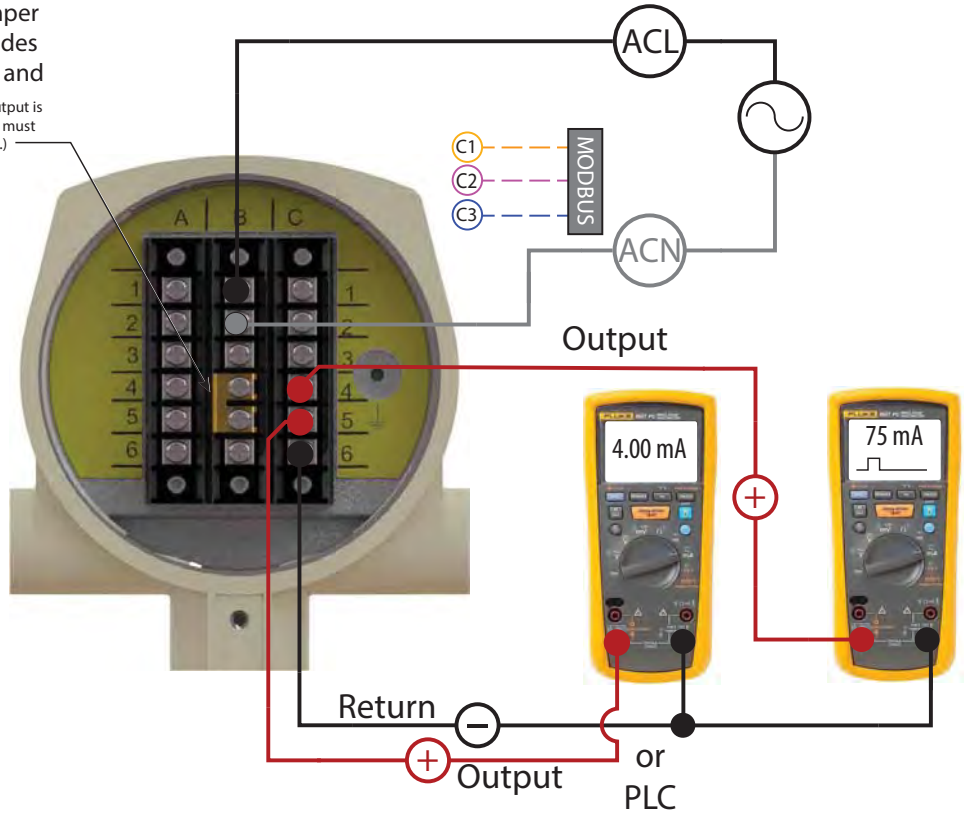

	A	B	C
RED	1	ACL	1 COMM
S1	2	ACN	2 B+
RED	3		3 A-
WHITE	4		4 PULSE OUT +
S2	5		5 4-20 mA +
WHITE	6		6 PULSE 4-20 mA-

**INTEGRAL**

80-0129-RevB SRP, AC, NON-ISOLATED, INTERNALLY POWERED, 4-20mA CURRENT PULSE OUT

**INTEGRAL**

	A	B	C
RED	1	ACL	1 COMM
GREEN	2	ACN	2 B+
BLUE	3		3 A-
WHITE	4		4 PULSE OUT +
BLACK	5		5 4-20 mA +
ORANGE	6		6 PULSE 4-20 mA-

**REMOTE**

80-0130-RevB SRP, AC, NON-ISOLATED, INTERNALLY POWERED, 4-20mA CURRENT PULSE OUT

**REMOTE**